

SX SERIES

Force & flow in harmony



» IP54 compact size

» 400V power supply

» True application oriented inverter

Safe force and smooth flow...

Designed to drive any high power application from 0.75 kW up to 800kW, the new SX series of compact inverters features embedded application dedicated functionality plus logic programming and customizable LCD information to give you all the control flexibility required for applications ranging from high torque to smooth flow and pressure control. Housed in robust IP54 cabinets and with EMC C3 Class filters and fuses (from 200 kW) as standard, the SX series protects your process while reducing downtime.



...in perfect harmony!

Force & flow in harmony

SX inverters deliver force safely through direct torque and accurate speed control with efficient vector braking in torque applications (cranes, crushers, mills and mixers etc) and smooth motor control with optimized operation and reduced energy consumption in flow and pressure applications (compressors, blowers, pumps and fans etc).

Product features & benefits

- 400 V power supply
(from 0.75kW up to 800kW)
- Built-in EMC filter for complete family and fuses from 200 kW save installation time & costs
- Multiple hardware customization to meet your needs in terms of safety (EN13849-1, EN62061), network communications, liquid cooling, special PCB coating, and more
- Compact & robust IP54 enclosure saves space & costs
- True application oriented thanks to its dedicated functionality, logic programmability and LCD customization
- Pre-maintenance alarms to protect your processes from damage and down-time
- Marine certificate DNV (Det Norske Veritas)








Safe Force

Safe Force

Force

Safe force

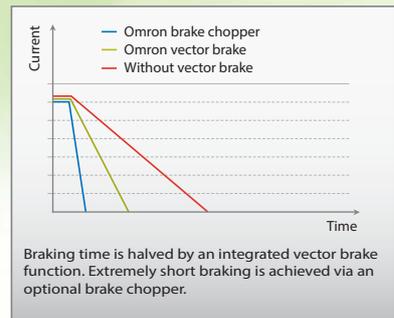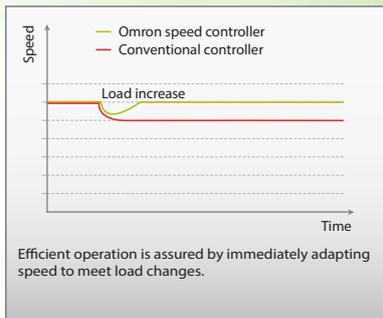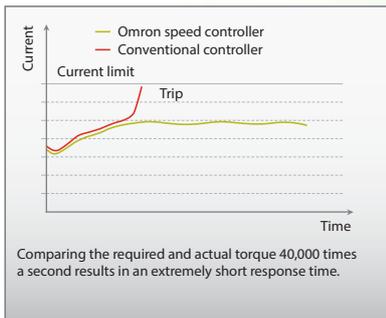

Direct torque control

Operation is protected from interruptions by means of very accurate and extremely quick speed and direct torque control. Disturbances caused by, e.g. peak loads, sudden load changes, or inaccurate ramp times are entirely eliminated.

Speed control

Changes liable to cause motor-speed deviation are reacted to quickly and the speed adjusted to the setpoint value. The set-up time is minimised thanks to an autotune function.

Vector brake function

Instead of using mechanical brakes, rapid and protective braking is assured by an integrated vector brake function. As the braking energy is dissipated through the motor itself, interruptions caused by excessive brake voltages are avoided.

Safe Force

The SX inverter series ensures that your installation is provided with all the power it requires while maintaining full control of the process itself. It does this by applying the combination of direct torque control, accurate speed control and efficient vector braking.

Moreover, it efficiently solves the critical start-up of high torque applications by boosting the torque to overcome initial peak loads, thus ensuring that sudden, jerky movements are prevented. This is achieved by providing the pre-magnetized motor with sufficient power to deliver the torque required to start the movement at the very moment the mechanical brake is released.

Safe Force

Product Overview

Voltage	Model	Motor kW		Output characteristics		
		For HD setting (150%, 1 min)	For ND setting (120%, 1 min)	Max out-put current (A)	Rated out-put current (A) at HD	Rated out-put current (A) at ND
400 V	SX-D40P7-E*	0.55	0.75	3.8	2	2.5
	SX-D41P5-E*	1.1	1.5	6	3.2	4
	SX-D42P2-E*	1.5	2.2	9	4.8	6
	SX-D43P0-E*	2.2	3	11.3	6	7.5
	SX-D44P0-E*	3	4	14.3	7.6	9.5
	SX-D45P5-E*	4	5.5	19.5	10.4	13
	SX-D47P5-E*	5.5	7.5	27	14.4	18
	SX-D4011-E*	7.5	11	39	21	26
	SX-D4015-E*	11	15	46	25	31
	SX-D4018-E*	15	18.5	55	29.6	37
	SX-D4022-E*	18.5	22	69	37	46
	SX-D4030-E*	22	30	92	49	61
	SX-D4037-E*	30	37	111	59	74
	SX-D4045-E*	37	45	108	72	90
	SX-D4055-E*	45	55	131	87	109
	SX-D4075-E*	55	75	175	117	146
	SX-D4090-E*	75	90	210	140	175
	SX-D4110-E*	90	110	252	168	210
	SX-D4132-E*	110	132	300	200	250
	SX-D4160-E*	132	160	360	240	300
	SX-D4200-E*	160	200	450	300	375
	SX-D4220-E*	200	220	516	344	430
	SX-D4250-E*	220	250	600	400	500
	SX-D4315-E*	250	315	720	480	600
	SX-D4355-E*	315	355	780	520	650
	SX-D4400-E*	355	400	900	600	750
	SX-D4450-E*	400	450	1032	688	860
	SX-D4500-E*	450	500	1200	800	1000
	SX-D4630-E*	500	630	1440	960	1200
	SX-D4800-E*	630	800	1800	1200	1500

* For all types:

Output voltage: to Mains supply voltage

Max. output frequency: 60 Hz

Rated input voltage and frequency for 400 V models:

3-phase 230 to 480 V, 50/60 Hz

Allowable voltage fluctuation: 0% to -15%

Allowable frequency fluctuation: 0% to 65 Hz

* Please add F or V depending on your application motor control needs:

F: Flux Vector Motor Control


V: V/F Motor Control





Smooth Flow




The SX inverter series ensures perfectly smooth control of flow and pressure. This is achieved by controlling the motor speed in fan and pump applications, as opposed to using mechanical solutions, such as throttle valves or dampers. The result is a considerable saving in energy consumption and therefore operating costs. Dedicated control functionality, such as a sleep mode, automatic pump rinsing and multiple pump control, ensure complete and precise control, while gentle starts and stops protect equipment from pressure spikes and eliminate the risk of pressure surges (water hammer).

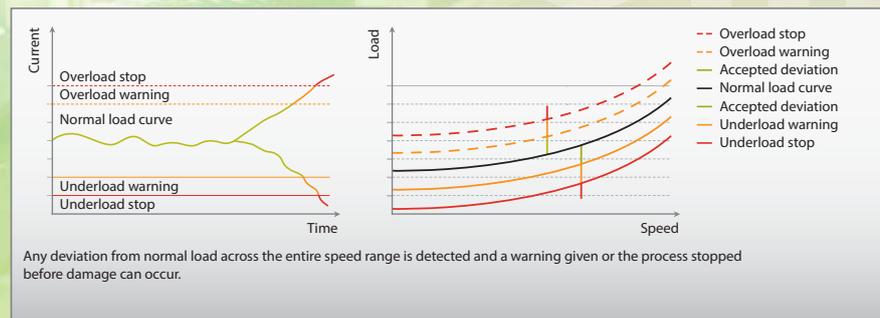

Load curve control

Your process is protected from damage and downtime by a built-in shaft power monitor in combination with a unique load curve protection function that monitors the equipment load curve across the entire speed range. This instantly detects harmful load conditions that could lead to inefficiency or damage. Setting the warning and safety stop levels is an easy matter.

Smooth Flow

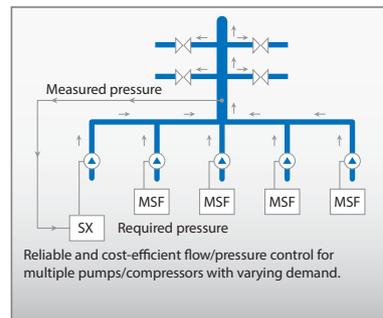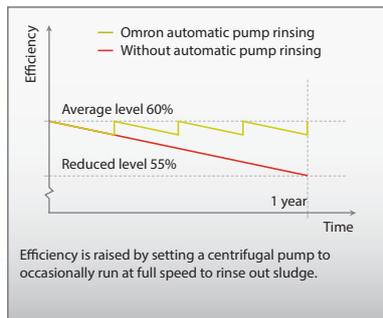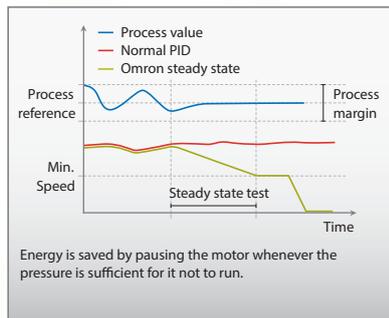

Sleep function

Process optimisation is achieved by a built-in sleep function that reduces the motor speed to zero when the pressure does not require the motor to run. This also reduces the energy requirement as well as equipment wear.

Automatic pump rinsing

Sludge adhering to impellers can reduce efficiency if a pump is idle or running at low speed. The SX solves this by allowing you to set the pump to run at full speed upon start up, or at predetermined intervals, thus cleaning and maintaining efficiency.

Multiple pump control

A flexible and cost-efficient way of keeping a constant flow or pressure despite varying demands is by using multiple pumps or compressors. Only the number of pumps or compressors required at any given time is used and thus energy is saved. Up to seven drives are controlled by one SX inverter without any other external equipment. The variable speed drive governs which pumps to start or stop, giving them all equal running time. Automatic switch-over to the next in line occurs if one pump or motor breaks down.

Smooth Flow
Smooth Flow



Australia Offices:

Sydney Office:

OMRON ELECTRONICS PTY. LTD.

Unit 6, 108 Silverwater Road,
Silverwater
Sydney, New South Wales 2128
Australia

Tel: (61-2) 9878 6377

Fax: (61-2) 9878 6981

Toll Free: 1300 766 766

E-mail: au_enquiry@ap.omron.com

Melbourne Office:

OMRON ELECTRONICS PTY. LTD.

Suites G.03, Building B,
18-24 Ricketts Road,
Mt Waverley Victoria 3149
Australia

Tel: (61-3) 8588 2600

Fax: (61-3) 8588 2690

E-mail: au_enquiry@ap.omron.com

Brisbane Office:

OMRON ELECTRONICS PTY. LTD.

Unit 14, 1378 Lytton Road
Hemmant 4174, Queensland
Australia

Tel: (61-7) 3859 3900

Fax: (61-7) 3348 8701

E-mail: au_enquiry@ap.omron.com



New Zealand Office:

OMRON ELECTRONICS LTD.

65 Boston Road, Mt Eden
Private Bag 92620
Symonds Street, Auckland
New Zealand

Tel: (64-9) 358 4400

Fax: (64-9) 358 4411

E-mail: nz_enquiry@ap.omron.com

Asia Pacific Head Office:

OMRON ASIA PACIFIC PTE. LTD.

438A Alexandra Road

#05-05/08

(Lobby 2) Alexandra Technopark

Singapore 119967

Tel: (65) 6835 3011 Fax: (65) 6835 2711

E-mail: ask@ap.omron.com

Website: www.omron-ap.com

Authorized Distributor